



ShawContract®




WHITE



SAND




LIGHT GREY

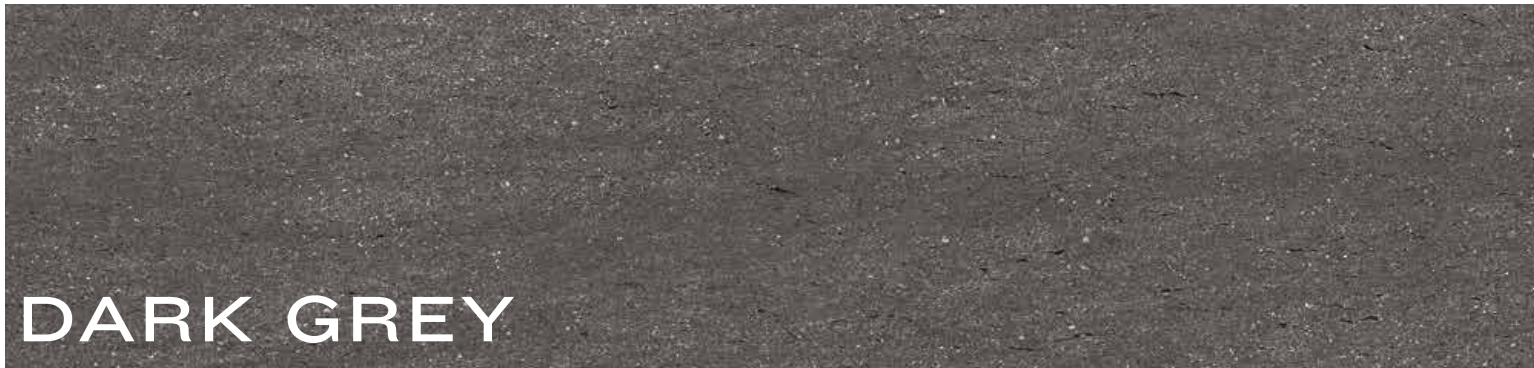

DARK GREY



NUT

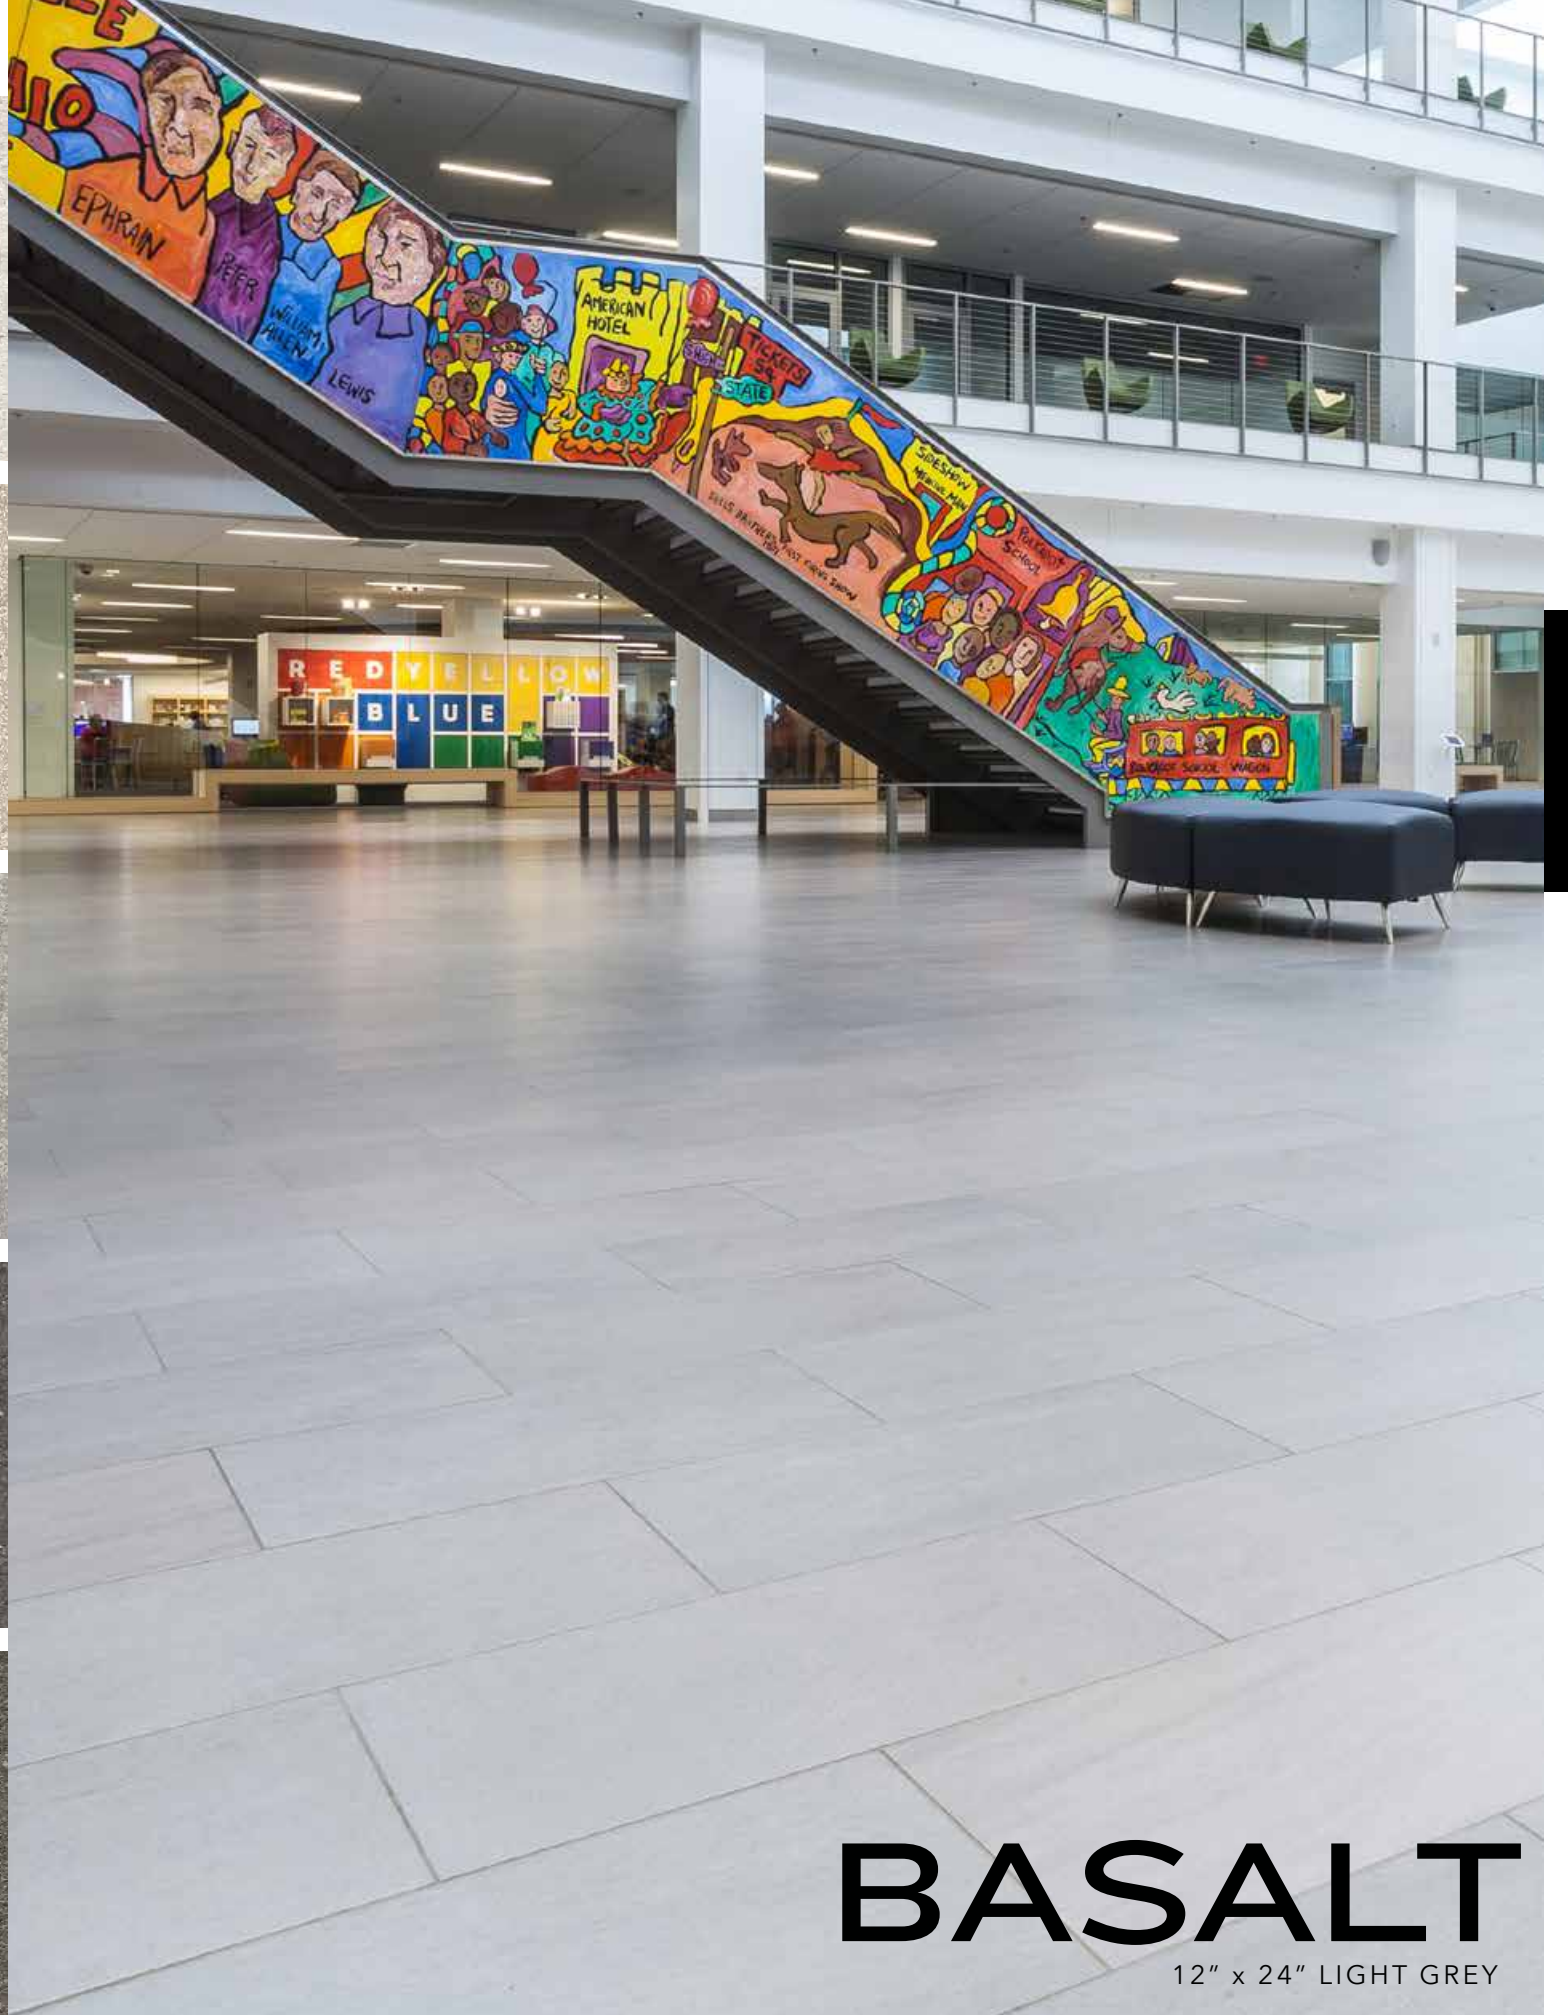


STONE


BASALT
12" x 24" LIGHT GREY

FIELD SIZES & SHADE VARIATION


sizes:

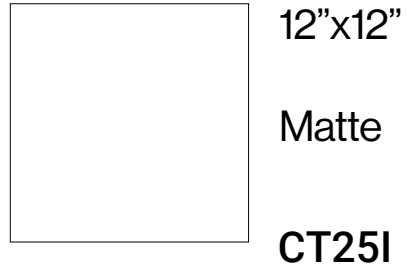

Basalt - White R / ***
Basalt - Sand R / ***
Basalt - Light Grey R / ***
Basalt - Dark Grey R / ***
Basalt - Nut R / ***



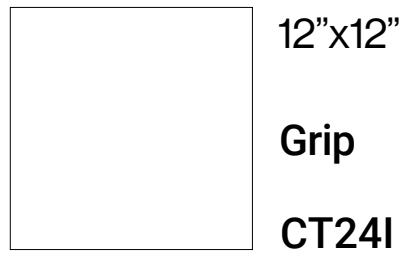


Basalt - White R / ***
Basalt - Sand R / ***
Basalt - Light Grey R / ***
Basalt - Dark Grey R / ***
Basalt - Nut R / ***

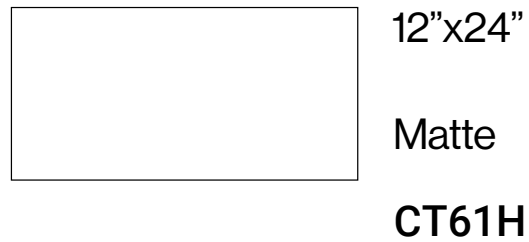

Basalt - White R
Basalt - Sand R
Basalt - Light Grey R
Basalt - Dark Grey R
Basalt - Nut R

shade variation:

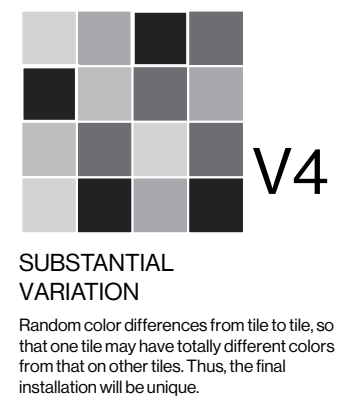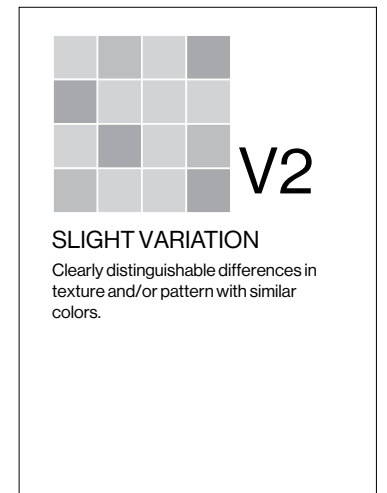

STONE

R - Rectified
* - Semi-Polished
*** - Grip








Colors shown may vary from actual product. Final selection should be made from actual product samples.

R - Rectified
* - Semi-Polished
*** - Grip

TECHNICAL SPECIFICATIONS

product specs:

BASALT

		REFERENCE VALUE	DECLARED VALUE
	SURFACE ABRASION	-	IV
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT
	DYNAMIC COEFFICIENT OF FRICTION	≥0.42% WET	MEETS REQUIREMENT
	BREAKING STRENGTH	AS REPORTED	≥400
	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED
	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED
	FREEZE RESISTANCE	AS REPORTED	RESISTANT

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICIENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

TECHNICAL SPECIFICATIONS



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb fumes, odors or smoke. It doesn't discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn't feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walking surface in both wet and dry conditions, according to the Americans with Disabilities Act.

HYGIENE/SANITATION & EASY CLEANING The product doesn't absorb odors or bacteria of any kind. It's easy to clean with a damp sponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the bathroom.

PACKAGING SPECIFICATIONS

packaging specs:

SIZES	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12" x 12" MATTE / POLISHED / GRIP	30 x 30	10 mm	13	13 ft ²	55 lbs	48	624 ft ²	2,832 lbs
12" x 24" MATTE / POLISHED / SEMI-POLISHED	30 x 60	10 mm	6	12 ft ²	52.8 lbs	48	576 ft ²	2,535 lbs

* Weight per pallet does not include pallet weight itself.

All other sizes will be packaged as ordered.

Minimum grout size recommended = 5mm (approx. 3/16"). If staggering tile placement, we recommend using a 30% offset. If a brick pattern (1/2" offset) is specified, a wider grout size is recommended to hide installation imperfections (minimum 1/4").

ShawContract®